

Humidity Controls FCU Hydronic 4 Ways Cassette Type

The first humidity control air conditioner without additional electric heater and humidifier.



Design for household and commercial building or where humidity control is required.



*With ENERCOV's
temperature & humidity
controller*



CSH Series

DC Motor

Cooling capacity range 4.2 - 11.7 kW



CSH Series

ENERCOV air conditioner for humidity control

CSH series, Air conditioner system for special function room application to maintain environment such as temperature and humidity at desirable range. Chilled water fan coil unit (FCU) is 4 ways cassette type installation and connected with proportional type control valve (0-10Vdc). Chilled water supply temperature shall be provided 7.2 deg C or below which is suitable within air conditioning comfort range of human being.

Micro-processor controls

Intelligent temperture & humidity controller with completed adaptive PID algorithm or FUZZY algorithm provide very precise room parameters. It consists of display unit, temperature & relative humidity sensor, controller and fan motor speed control. LCD display on the display unit shows real time actual temperature and relative humidity.

Display unit functions




Dim : 87Wx87Hx20D mm.
Wall mount

- Heating Element On/Off
- Temperature and Humidity Control Mode
- Cooling Control Mode
- FILTER** Filter Clog Indicator (if applied)
- ALARM** Unit Alarm Indicator
- FAN AUTO** Fan Automatic Control Status Indicator
- PROGM** Programmable Mode
- Actual Room Temperature or Setpoint Indicator
- Actual Room Humidity or Setpoint Indicator
- Fan Speed Running Indicator
- Function Keypads



Wireless Remote Control

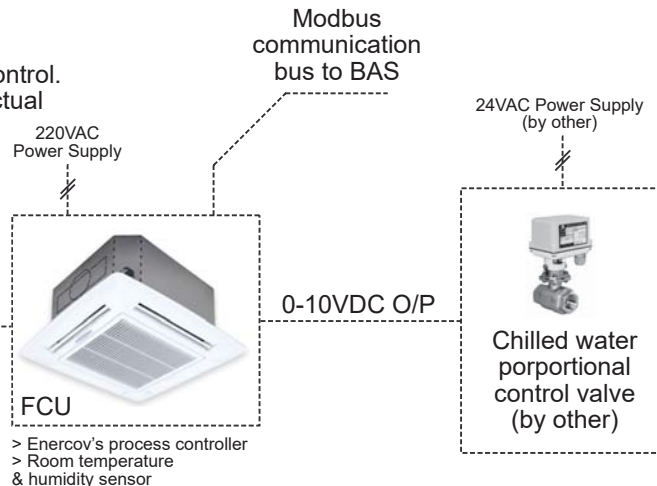



Control Functions

1. Room temp. & humidity are controlled by adaptive PID algorithm.
2. Cooling mode and temperature/humidity control mode selectable.
3. Aux HEATER lights up means hot gas reheat coil energized.
4. Room temperature and relative humidity real time display
5. Supply air fan can config to vary speed to maintain room condition automatically.
6. Room sensors faulty alarm codes.
7. Room temperature & humidity sensors calibration are also available.
8. Proportional, integral gain and calculation time are configurable.
9. FCU fan minimum speed is configurable.
10. Alarm display codes.
11. Electrical heater protection cut off system. (option)
12. Pre configuration programmable software.
13. Modbus interface port for BAS communication (option).

Network Management (option, max 64 CSHs/loop)

CSH's controller can communicate with BAS or BMS by modbus protocol, max 64 nodes per loop and 300 meters length.

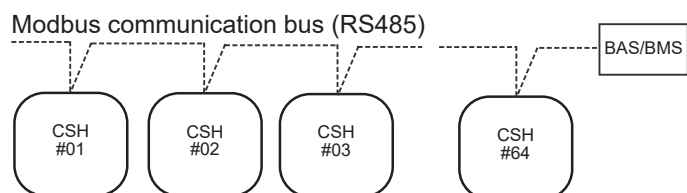

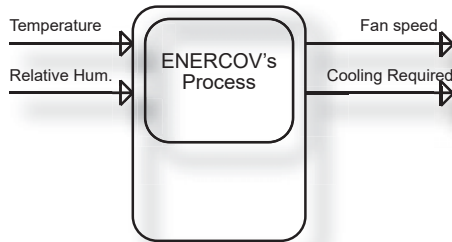

Very accurate
temperature & humidity
controls.

+/-5%RH

Very accurate
room humidity result
(Based on sensible load 20 - 100% variation.)

Cooling coil characteristic

When adjusting chilled water cooling coil flow rate and fan speed together, we can get cooling capacity in term of sensible capacity and latent capacity changing according to percent opening of chilled water control valve and airflow rate of cooling coil. From that relationship, we can conclude the feature of parameters responding upon adjust water flow and air flow rate through cooling coil as followings;

- > Increase fan speed -> T drops, H increases
- > Reduce fan speed -> T increases, H drops
- > Increase % valve -> T drops, H drops
- > Reduce % valve -> T increases, H increases

T is temperature and H is humidity. Room temperature is standing for sensible heat load. Room humidity is standing for latent load. That means if we regulate air flow rate and water flow rate at proper quantities according room sensible and latent load, we can control room temperature and humidity at desired setpoint without additional heating element or humidifier. This is ENERCOV's process to maintain room temperature and humidity very constantly.

There are two factors to reducing lower room humidity or dewpoint temperature by reduce supply chilled water temperature or increasing chilled water flow rate. However, if chilled water supply temperature is 7.2 C, we can get room temperature 23.0 - 25.0 C at humidity below 60%RH approximately depending on room heat load and fresh air intake quantity.

Conventional controls algorithm

Controls algorithm of general feedback control is called proportion, integral and differential (PID) loop. The PID control loop is very common used for various HVAC or others application. However, PID loop is a single input and single output parameter. It is not suitable for multiple inputs/outputs parameters. In this case, room temperature and relative humidity are changed when adjusting fan speed. In the same way, room temperature and relative humidity are also changed when adjusts water flow rate. This system has multiple inputs (room temperature and relative humidity) and multiple outputs (fan speed and %valve opening). Normal PID control loop can not support this application.

ENERCOV's process algorithm

It is higher level of control loop which is developed from single PID control loop. ENERCOV's process algorithm shall has dual PID control loops to minimize an error of temperature and humidity. Some time is called adaptive PID optimization control system or FUZZY algorithm which is suitable for multiple inputs/outputs system. The ENERCOV's process algorithm is developed to control room temperature and relative humidity by varing supply air fan and chilled water flow rate. The result of this control algorithm is very precise of room condition as required without additional waste energy devices such as electric heater or humidifier.

With this smart algorithm, energy saving is higher than 50% when compared to conventional humidity control air conditioner. Further, room condition will always maintain within human being comfort zone.

CSH 036 - 040

DC MOTOR FAN 1

220VAC

24VAC

24VDC

ROOM AIR TEMPERATURE & HUMIDITY SENSOR

DRAIN WATER HI LEVEL ALARM

INDOOR FAN SWING HEATING

PROP. CHW CONTROL VAVLE (BY OTHER)

POWER SUPPLY 220V/50Hz

— PROVIDE BY ENERCOV
 --- PROVIDE BY OTHER (FIELD WIRING)

Technical specification

Fan Coil Model		Unit	CSH012	CSH024	CSH030	CSH036	CSH040			
Air Flow		Turbo Speed	CMH	774	1296	1656	1728	1764		
		High Speed	CMH	756	1044	1440	1620	1692		
		Turbo Speed	CFM	456	763	975	1017	1038		
		High Speed	CFM	445	614	848	954	996		
		Minimum Speed	CMH	155	259	331	346	353		
Cooling mode	Turbo Speed	Total Cooling Capacity	kW	4.25	7.63	9.25	11.40	11.73		
			BTU/H	14505	26041	31570	38908	40034		
		Sensible Cooling Capacity	kW	3.15	5.60	7.00	8.10	8.26		
		Water Flow Rate	l/s	0.203	0.364	0.44	0.544	0.554		
	High Speed	Pressure Drop	kPa	17.00	20.00	27.20	29.50	30.00		
		Total Cooling Capacity	kW	4.18	6.36	8.45	10.60	11.20		
		Sensible Cooling Capacity	kW	30.60	4.52	6.30	7.55	8.00		
		Water Flow Rate	l/s	0.20	0.303	0.403	0.505	0.535		
Noise	Sound Pressure Levels	Pressure Drop	kPa	16.50	15.80	23.00	25.00	28.20		
		Turbo Speed	dB(A)	47	40	45	45	45		
		High Speed	dB(A)	45	35	42	43	44		
		Medium Speed	dB(A)	43	31	39	40	42		
		Low Speed	dB(A)	39	28	34	38	39		
		Quiet	dB(A)	35	22	28	33	36		
		Electricity	Power Input	Turbo Speed	W	75	54	90	116	120
				High Speed	W	69	34	70	98	112
Current Input	Turbo Speed		A	0.63	0.51	0.8	0.92	0.96		
	High Speed	A	0.59	0.35	0.6	0.77	0.87			
Power	Supply	-	220-240 V / 1 / 50 Hz							
Aux. Electric Heater (Option)		Total Heating Capacity	W	300	500	750	750	900		
		Power Supply	-	220-240 V / 1 / 50 Hz						
		Current	A	1.36	2.27	3.41	3.41	4.09		
Water Pipe Connection	Diameter	In.	3/4 (Nominal)	1 (Nominal)						
Drain Pipe	Diameter (OD)	mm.	24	26						
Dimensions without Packing (HxWxD)	Main Unit	mm.	280x574x574	320x844x844	320x844x844	320x844x844	320x844x844			
	Panel	mm.	65x720x720	67x950x950	67x950x950	67x950x950	67x950x950			
Dimensions with Packing (HxWxD)	Main Unit	mm.	394x790x675	400x910x910x	400x910x910	400x910x910	400x910x910			
	Panel	mm.	126x790x800	156x1030x1035	156x1030x1035	156x1030x1035	156x1030x1035			
Net Weight	Main Unit	Kg.	19	32	32	35	35			
	Panel	Kg.		5	5	5	5			
Gross Weight	Kg	Kg.	23	37	37	40	40			
	Panel	Kg.	5	8	8	8	8			

Note : - Technical specifications are subject to change without prior notice.
 - Cooling capacity based on chilled water temperature 7°C/12°C and air on coil 27CDB/19CWB.

Enercov (Thailand) Co.,Ltd.
 42/40 Moo 5, Lam Lukka, A. Lam Lukka,
 Pathumthani 12150, Thailand
 Phone : (662) 199-2611-18
 Fax : (662) 199-2619

Enercov (Singapore) PTE LTD
 80 Genting Lane, #06-02 Genting Block,
 Ruby Industrial Complex, Singapore 349565
 Phone : (65) 6746-8886
 Fax : (65) 6745-2678